





## ALL THE GUARANTEES OF A LEADING BRAND

The FreeTime range draws on the expertise of Gazzotti, a name that is synonymous with parquet due to its extensive wood-working traditions and its vast experience in the flooring sector. FreeTime is a quality product for attention to the treatment and working of wood. Thanks to its strength and elegant appearance, FreeTime is ideal for flooring terraces, pool edges, platforms and walkways in gardens: a touch of sophistication that enhances outdoor spaces, making them more comfortable, pleasant and natural, in harmony with modern building trends.

### THE RANGE

The range made up of 4 different products:

- smooth planks Ash Thermic
- Grained planks Ipè
- Smooth planks Ipè
- Grained tiles Ipè


Grained Planks Ipè (hidden fastening)



## Grained Planks Ipè

Ipè planks in solid wood for outdoor use; over time this wood species has proved to be suitable for contact with the outdoors. The product is characterized by tongues on the heads that permit an improvement in the flatness of the planks. The longer sides are processed with double grooves and rounded in order to make them safe for walking. Laying may be carried out with hidden fastening using special clips in stainless steel or with screws in full view by fastening the planks on floating slats. The surface in full view is milled to obtain a slip-resistant effect in the event that the flooring is to be used, for example, at the edges of a pool.

Dimensions:  
thickness 20/22 mm  
width 70/100 mm  
length 800/2000 mm

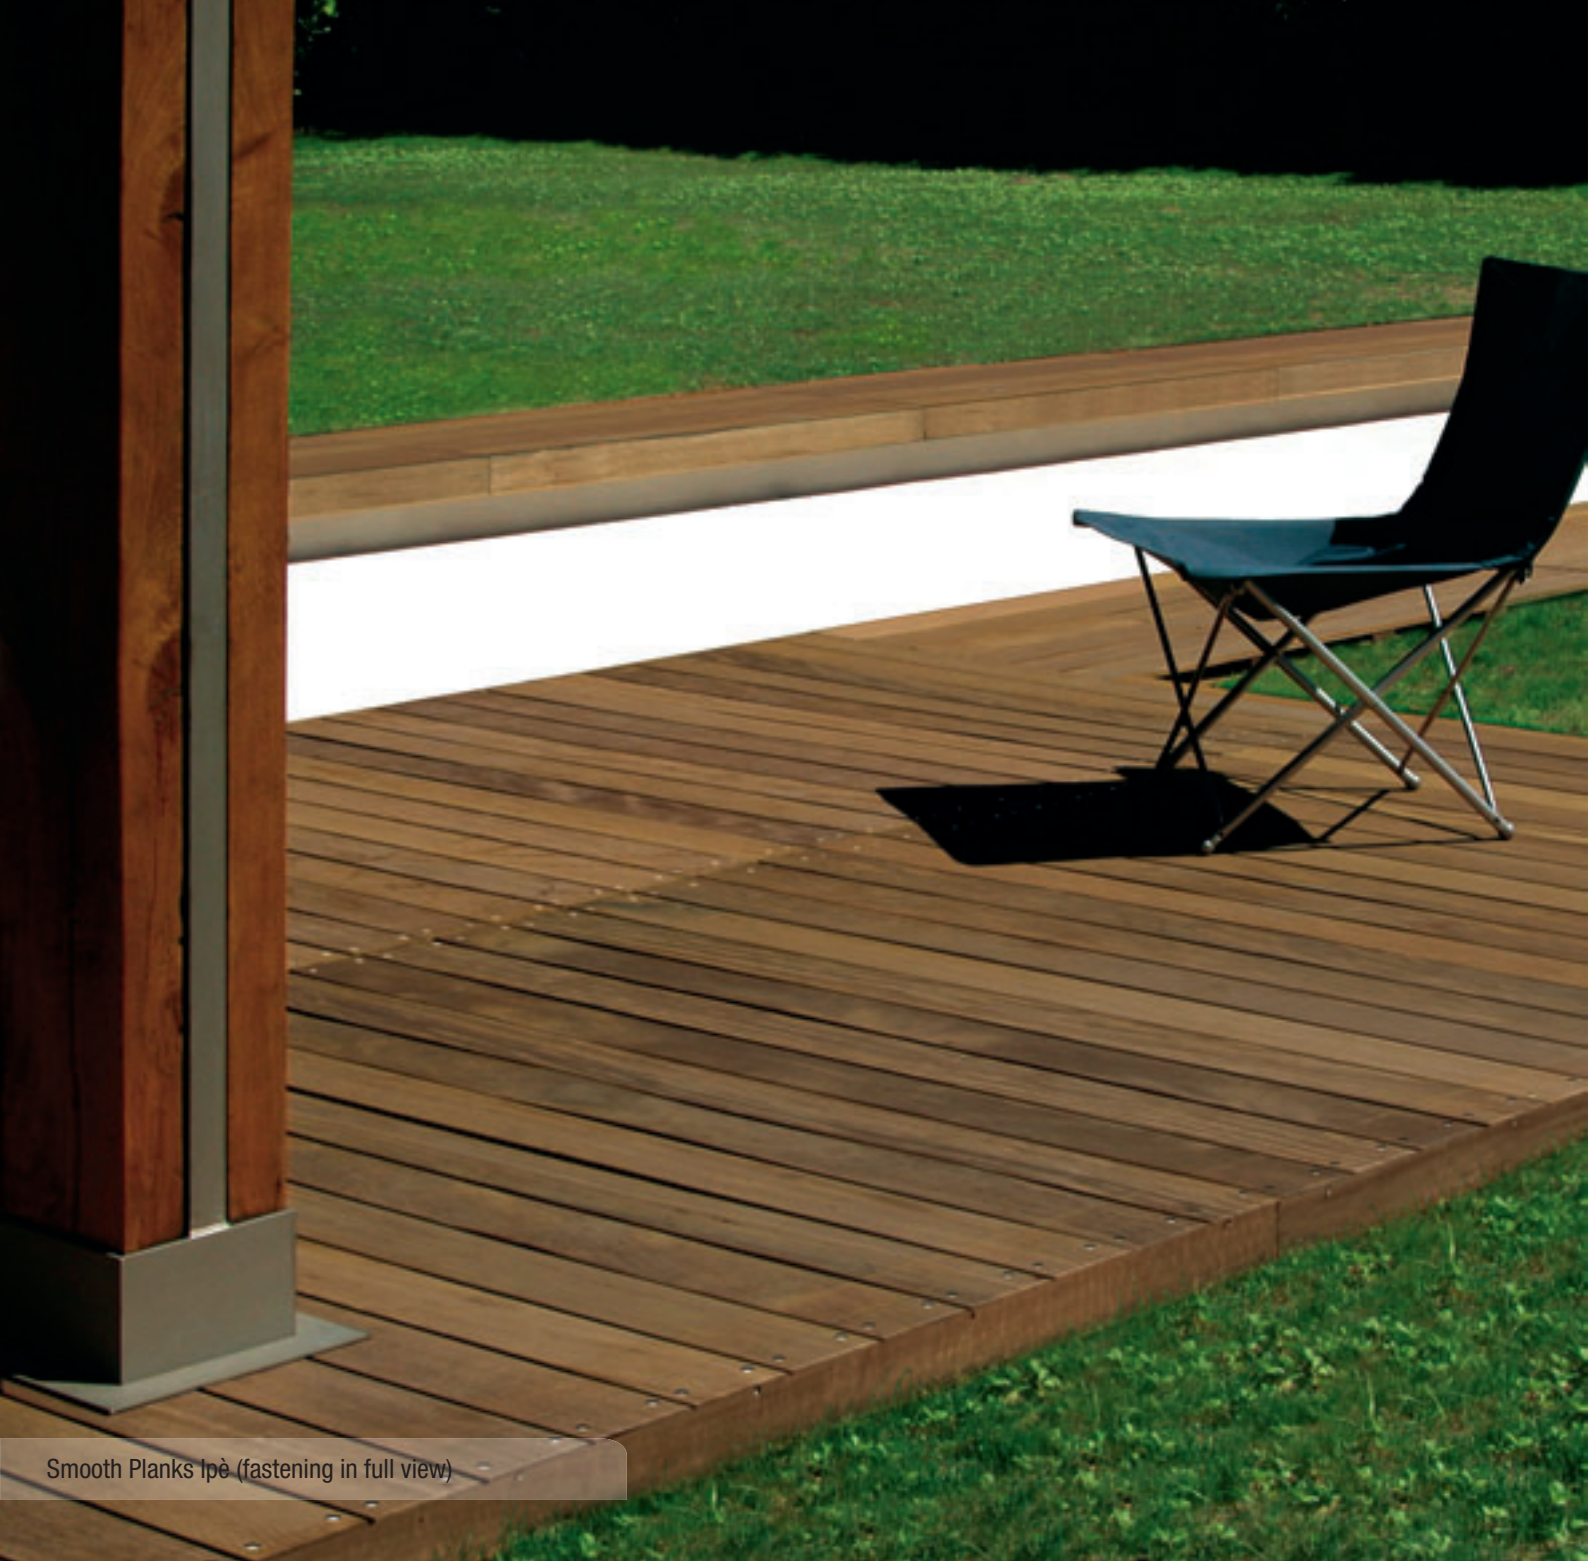

Smooth Planks Ipè (fastening in full view)



## Smooth Planks Ipè

Ipè planks in solid wood for outdoor use; over time this wood species has proved to be suitable for contact with the outdoors. The product is characterized by tongues on the heads that permit an improvement in the flatness of the planks. The longer sides are processed with double grooves and rounded in order to make them safe for walking. Laying may be carried out by hidden fastening using special clips in stainless steel or with screws in full view by fastening the planks on floating slats. The surface in full view is smooth in order to give maximum prominence to the wood grain, thus obtaining a perfectly natural appearance.

Dimensions:  
thickness 20/22 mm  
width 70/100 mm  
length 800/2000 mm



## ALL THE GUARANTEES OF A LEADING BRAND

The FreeTime range draws on the expertise of Gazzotti, a name that is synonymous with parquet due to its extensive wood-working traditions and its vast experience in the flooring sector. FreeTime is a quality product for attention to the treatment and working of wood. Thanks to its strength and elegant appearance, FreeTime is ideal for flooring terraces, pool edges, platforms and walkways in gardens: a touch of sophistication that enhances outdoor spaces, making them more comfortable, pleasant and natural, in harmony with modern building trends.

### THE RANGE

The range made up of 4 different products:

- smooth planks Ash Thermic
- Grained planks Ipè
- Smooth planks Ipè
- Grained tiles Ipè

Grained Planks Ipè (hidden fastening)



## Grained Planks Ipè

Ipè planks in solid wood for outdoor use; over time this wood species has proved to be suitable for contact with the outdoors. The product is characterized by tongues on the heads that permit an improvement in the flatness of the planks. The longer sides are processed with double grooves and rounded in order to make them safe for walking. Laying may be carried out with hidden fastening using special clips in stainless steel or with screws in full view by fastening the planks on floating slats. The surface in full view is milled to obtain a slip-resistant effect in the event that the flooring is to be used, for example, at the edges of a pool.

Dimensions:  
thickness 20/22 mm  
width 70/100 mm  
length 800/2000 mm



### Smooth Planks Ash Thermic

The exclusive and revolutionary evolution in outdoor wood flooring

Smooth planks Ash Thermic  
(hidden fastening)



## Smooth Planks Ash Thermic

Thermic Ash solid wood planks for the outdoors: an absolute novelty since the wood, after being brought to very high temperature, is subjected to premature ageing and molecular rupture that permit its humidity to be maintained for a resulting increase in stability. The planks are made with double grooves on the long sides, rounded to make it safe to walk on them. They are appropriate for hidden laying or laying with screws in full view, always carried out on floating slats. The product, technologically advanced and extremely reliable, thanks to its use of the same procedure used to create saunas, acquires an extremely elegant and natural dark color. The surface in full view is smooth in order to give maximum prominence to the wood grain, thus obtaining a perfectly natural appearance.

Dimensions:  
thickness 20/22 mm  
width 100/140 mm  
length 800/2500 mm



**> where to lay:** on all types of foundation where an adequate slope has been provided to drain rainwater.

If it is directly placed on a waterproofing sheath it is best to place the slats on special fixed and adjustable feet with rounded edges in order to avoid possibly scratching the sheath. Installation on grass requires that the area to be floored be flattened beforehand and two layers of non woven fabric be inserted to reinforce the zone and keep grass from growing back between the planks.

#### **FreeTime Planks with hidden fastening**

**> how to lay:** they are laid by fastening them on floating slats. The slats may be lifted from the foundation by placing them on special feet whose height is adjustable (available for sale) to maintain the flooring level by enabling the outflow of water and the passage of piping.

A space not exceeding 30 cm must be left between the floating slats. The planks are fastened in correlation to the slats (note that each head should be locked on them) with Gazzotti's stainless steel hidden clips and stainless steel flathead screws. The distance between one plank and another is automatically determined by the clip, while alignment must be checked before final fastening.

#### **FreeTime Planks with fastening in full view**

**> how to lay:** they are laid by fastening them on floating slats. The slats may be lifted from the foundation by placing them on special feet whose height is adjustable (available for sale) to maintain the flooring level by enabling the outflow of water and the passage of piping. It is necessary to leave 4-5 mm of space between the planks on the side in order to enable water drainage. A space not exceeding 30 cm must be left between the floating slats.

The planks must be fastened in correlation to the slats (note that each head should be locked on them) on the upper part, with double screws, after having perforated to avoid cracks and obtain optimal locking.

It is necessary to use stainless steel countersunk screws. If a regular screw layout is requested, the installer should proceed with regular formwork laying.

#### **FreeTime Tiles**

**> how to lay:** the tiles are already assembled and ready to form flooring; they are laid on a smooth surface with adequate slope. They may be laid with fixed spacers and may be lifted from the foundation by placing them on special feet whose height is adjustable (available for sale) to maintain the flooring level by enabling the outflow of water and the passage of piping. Once placed, the tiles can be inspected and are easily removable.

## Suggestions for maintenance and preservation

Previously cleaned FreeTime flooring must be treated with the special protective oil Sundeck Oil Gazzotti when installed in order to ensure proper preservation of the flooring over time.

About 1 L of Sundeck Oil should be used per 15 m<sup>2</sup> of flooring. The flooring is not guaranteed if products other than those indicated are used.

Regular maintenance must be performed with a simple cloth moistened with water alone or, where appropriate, with water and suitable neutral detergents. Over time the flooring tends to absorb the oil applied at the time of installation and takes on a "dry" appearance and touch: it is therefore necessary to clean the flooring of all traces of dirt and filth and apply Sundeck Oil again.



il parquet dal 1910

Gazzotti SpA  
40013 Trebbo di Reno  
Bologna - Italy

Tel. +39 051 6329611  
Fax +39 051 701518

e-mail: [infoe@gazzotti.it](mailto:infoe@gazzotti.it)  
[www.gazzotti.it](http://www.gazzotti.it)